



ASCENTECH®

---

PRODUCT

CATALOGUE



# ASCENTECH

## ABOUT US

Ascentech, a DAC certified ISO 9001 & 14001 organization, has been a leading name in LED lighting from 2014. Ascentech is recognized as an R&D house. Ascentech has state-of-the-art testing equipments and conceives, designs and makes LED based products, including all electronics like led PCB's, LED drivers and fixtures. After final assembly, extensive in-house testing is done before supplying products to the market. We, at Ascentech, believe that it is critical for our products to have better illumination ability and energy efficiency and be also 100% fault-free. Therefore, to deliver the best quality products, we have followed a quality management process that adheres to international standards. We are backed by a pool of quality personnel who regularly check the production process to ensure that we leave no loopholes for any kind of fault to occur.

Ascentech vast product range is well accepted by various government, semi-government organizations/institutions and private companies and has received satisfactory performance test certificates from them. Research & Development Ascentech has developed the technology behind LED-lighting systems after investing many man-years in R&D, mastering the technology - electronics and optics. We have an R&D lab having a dedicated facility and team working on new and innovative products for energy conservation. To meet the latest market demands, we are backed by a well equipped manufacturing unit with latest equipment and machines. Based on advanced and sophisticated technology, the different machines installed at our unit are capable of achieving our target production with full accuracy and quality.

# COB LIGHTS





## COB SWIVEL DOWN LIGHTS



FGDL-05

WATTAGE : 9W  
HEIGHT : 45 mm  
DIA : 100 mm  
COLOUR : 6500K  
CUT OUT DIA : 80 mm



FGDL-07

WATTAGE : 15W  
HEIGHT : 55 mm  
DIA : 115 mm  
COLOUR : 6500K  
CUT OUT DIA : 95 mm



FGDL-09

WATTAGE : 20W  
HEIGHT : 75 mm  
DIA : 140 mm  
COLOUR : 6500K  
CUT OUT DIA : 120 mm



FGDL-10

WATTAGE : 24W  
HEIGHT : 75 mm  
DIA : 140 mm  
COLOUR : 6500K  
CUT OUT DIA : 120 mm



FGDL-11

WATTAGE : 30W  
HEIGHT : 75 mm  
DIA : 160 mm  
COLOUR : 6500K  
CUT OUT DIA : 140 mm



FGDL-13

WATTAGE : 40W  
HEIGHT : 75 mm  
DIA : 160 mm  
COLOUR : 6500K  
CUT OUT DIA : 140 mm



CRI >80



>30,000 Hrs.

Applications : Residential, Small Offices, Service Areas, Retail Shops etc..



## COB SPOT DOWN LIGHTS

FGDL-15



WATTAGE : 9W  
 HEIGHT : 65 mm  
 DIA : 75 mm  
 COLOUR : 6500K  
 CUT OUT DIA : 65 mm

FGDL-17



WATTAGE : 15W  
 HEIGHT : 80 mm  
 DIA : 85 mm  
 COLOUR : 6500K  
 CUT OUT DIA : 75 mm


FGDL-19



WATTAGE : 20W  
 HEIGHT : 90 mm  
 DIA : 95 mm  
 COLOUR : 6500K  
 CUT OUT DIA : 85 mm


## CONCEALED LIGHT

FGDL-01



WATTAGE : 05W  
 HEIGHT : 48 mm  
 DIA : 115 mm  
 COLOUR : Cool White  
 CUTOUT DIA : 75 mm  
 BODY : Aluminium with PC

FGDL-03



WATTAGE : 07W  
 HEIGHT : 63 mm  
 DIA : 116 mm  
 COLOUR : Cool White  
 CUTOUT DIA : 88 mm  
 BODY : Aluminium with PC



CRI >80



>30,000 Hrs.

Applications : Residential, Small Offices, Service Areas, Retail Shops etc..



## COB TRACK LIGHTS



FGTK-01

WATTAGE : 5W  
CCT : 6000K  
BODY : Aluminium



FGTK-02

WATTAGE : 10W  
CCT : 6000K  
BODY : Aluminium



FGTK-03

WATTAGE : 20W  
CCT : 6000K  
BODY : Aluminium



FGTK-04

WATTAGE : 30W  
CCT : 6000K  
BODY : Aluminium



CRI >80



>30,000 Hrs.

Applications : Residential, Small Offices, Service Area, Retail Shops etc..



## ADJUSTABLE LED SURFACE COB LIGHT

FGTK-06



WATTAGE : 10W  
CCT : 6000K  
BODY : Aluminium

FGTK-07



WATTAGE : 20W  
CCT : 6000K  
BODY : Aluminium

## COB SURFACE CYLINDER

FGDL-20



WATTAGE : 7W  
HEIGHT : 70 mm  
DIA : 55 mm  
COLOUR : 6500K

FGDL-21



WATTAGE : 12W  
HEIGHT : 90 mm  
DIA : 70 mm  
COLOUR : 6500K

FGDL-22



WATTAGE : 18W  
HEIGHT : 100 mm  
DIA : 85 mm  
COLOUR : 6500K



CRI >80




>30,000 Hrs.

Applications : Residential, Small Offices, Service Area, Retail Shops etc..




## WALL LIGHT



FGWL-01

WATTAGE : 3W  
 LxBxH : 50x40x35 mm  
 CCT : 3000K  
 SHAPE : Rectangular  
 TYPE : 1 Way



FGWL-02

WATTAGE : 6W  
 LxBxH : 50x40x35 mm  
 CCT : 3000K  
 SHAPE : Rectangular  
 TYPE : 2 Way



FGWL-03

WATTAGE : 7W  
 LxBxH : 50x90x35 mm  
 CCT : 3000K  
 SHAPE : Rectangular  
 TYPE : 2 Way



FGWL-04

WATTAGE : 6W  
 LxBxH : 75x75x35 mm  
 CCT : 3000K  
 SHAPE : Square  
 TYPE : 2 Way



FGWL-05

WATTAGE : 7W  
 LxBxH : 70x70x50 mm  
 CCT : 3000K  
 SHAPE : Square  
 TYPE : 2 Way



FGWL-06

WATTAGE : 12W  
 LxBxH : 70x70x50 mm  
 CCT : 3000K  
 SHAPE : Square  
 TYPE : 4 Way



CRI >80



>20,000 Hrs.

Applications : Residential, Small Offices, Service Area, Retail Shops etc..





FGWL-07



WATTAGE	: 12W
LxBxH	: 75x110x40 mm
CCT	: 3000K
SHAPE	: Rectangular
TYPE	: 2 Way



FGWL-08

WATTAGE	: 18W
LxBxH	: 160x80x45 mm
CCT	: 3000K
SHAPE	: Rectangular
TYPE	: 2 Way

## WALL CYLINDER UP-DOWN SPOT LIGHT

FGDL-23



WATTAGE	: 12W
HEIGHT	: 125 mm
DIA	: 80 mm
COLOUR	: 6500K



CRI >80



>20,000 Hrs.

Applications : Residential, Small Offices, Service Area, Retail Shops etc..



## LED FOOT LIGHT

FGFT-01



WATTAGE	: 3W
LxBxH	: 100x100x60 mm
COLOUR	: 3000K
BODY	: Aluminum
CUT OUT SIZE	: 90x90 mm

FGFT-02



WATTAGE	: 6W
LxBxH	: 100x100x60 mm
COLOUR	: 3000K
BODY	: Aluminum
CUT OUT SIZE	: 90x90 mm

FGFT-03



WATTAGE	: 12W
LxBxH	: 100x100x60 mm
COLOUR	: 3000K
BODY	: Aluminum
CUT OUT SIZE	: 90x90 mm



CRI >80



>20,000 Hrs.

Applications : Residential, Small Offices, Service Area, Retail Shops etc..



## BULK HEAD LIGHT



FGBK-02

WATTAGE : 5W  
 LxBxH : 167x78x61 mm  
 CCT : 6000K  
 DIFFUSER : Polycarbonate



FGBK-02

WATTAGE : 10W  
 LxBxH : 167x78x61 mm  
 CCT : 6000K  
 DIFFUSER : Polycarbonate



FGBK-03

WATTAGE : 12W  
 LxBxH : 167x78x61 mm  
 CCT : 6000K  
 DIFFUSER : Polycarbonate



FGBK-03

WATTAGE : 15W  
 LxBxH : 167x78x61 mm  
 COLOUR : 6000K  
 DIFFUSER : Polycarbonate



FGBK-04

WATTAGE : 18W  
 LxBxH : 167x78x61 mm  
 COLOUR : 6000K  
 DIFFUSER : Polycarbonate



FGBK-04

WATTAGE : 20W  
 LxBxH : 167x78x61 mm  
 COLOUR : 6000K  
 DIFFUSER : Polycarbonate



CRI >80



>20,000 Hrs.

Applications : Residential, Small Offices, Service Area, Retail Shops etc..

# LED PANEL LIGHTS





## LED ULTRA SLIM ROUND PANEL




FGPL-02

WATTAGE	: 6W	6W
HEIGHT	: 31 mm	31 mm
DIA	: 120 mm	120 mm
COLOUR	: Cool White	Warm White
CUT OUT DIA	: 100 mm	100 mm
BODY	: PC	PC

FGPL-15

WATTAGE	: 6W	6W
HEIGHT	: 31 mm	31 mm
DIA	: 120 mm	120 mm
COLOUR	: Cool White	Warm White
CUT OUT DIA	: 100 mm	100 mm
BODY	: PC	PC

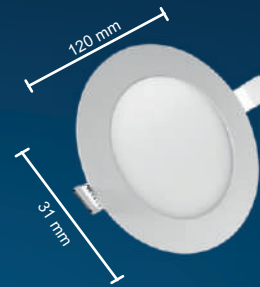


FGPL-03

WATTAGE	: 9W	9W
HEIGHT	: 31 mm	31 mm
DIA	: 120 mm	120 mm
COLOUR	: Cool White	Warm White
CUT OUT DIA	: 100 mm	100 mm
BODY	: PC	PC

FGPL-16

WATTAGE	: 9W	9W
HEIGHT	: 31 mm	31 mm
DIA	: 120 mm	120 mm
COLOUR	: Cool White	Warm White
CUT OUT DIA	: 100 mm	100 mm
BODY	: PC	PC

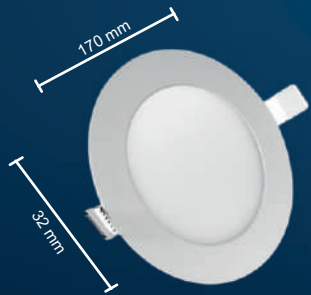

FGPL-04

WATTAGE	: 12W	12W
HEIGHT	: 32 mm	32 mm
DIA	: 170 mm	170 mm
COLOUR	: Cool White	Warm White
CUT OUT DIA	: 150 mm	150 mm
BODY	: PC	PC

FGPL-17

WATTAGE	: 12W	12W
HEIGHT	: 32 mm	32 mm
DIA	: 170 mm	170 mm
COLOUR	: Cool White	Warm White
CUT OUT DIA	: 150 mm	150 mm
BODY	: PC	PC



FGPL-05

WATTAGE	: 15W	15W
HEIGHT	: 32 mm	32 mm
DIA	: 170 mm	170 mm
COLOUR	: Cool White	Warm White
CUT OUT DIA	: 150 mm	150 mm
BODY	: PC	PC

FGPL-18

WATTAGE	: 15W	15W
HEIGHT	: 32 mm	32 mm
DIA	: 170 mm	170 mm
COLOUR	: Cool White	Warm White
CUT OUT DIA	: 150 mm	150 mm
BODY	: PC	PC



CRI >80



>40,000 Hrs.

Applications : Residential, Small Offices, Service Areas, Retail Shops etc..



## LED ULTRA SLIM ROUND PANEL




FGPL-07

WATTAGE : 20W  
 HEIGHT : 32 mm  
 DIA : 225 mm  
 COLOUR : Cool White  
 CUT OUT DIA : 200 mm  
 BODY : PC

FGPL-20

WATTAGE : 20W  
 HEIGHT : 32 mm  
 DIA : 225 mm  
 COLOUR : Warm White  
 CUT OUT DIA : 200 mm  
 BODY : PC

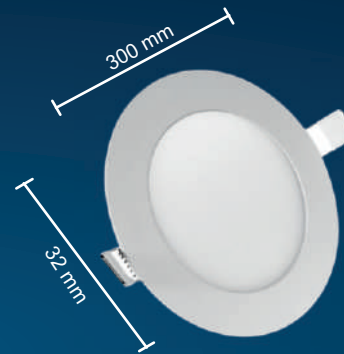

FGPL-08

WATTAGE : 24W  
 HEIGHT : 32 mm  
 DIA : 300 mm  
 COLOUR : Cool White  
 CUT OUT DIA : 275 mm  
 BODY : PC

FGPL-21

WATTAGE : 24W  
 HEIGHT : 32 mm  
 DIA : 300 mm  
 COLOUR : Warm White  
 CUT OUT DIA : 275 mm  
 BODY : PC



CRI >80




>40,000 Hrs.

Applications : Residential, Small Offices, Service Areas, Retail Shops etc..




## LED ULTRA SLIM SQUARE PANEL

FGPL-28



WATTAGE	: 6W	: 6W
LxBxH	: 85x85x21 mm	: 85x85x21 mm
COLOUR	: Cool White	: Warm White
CUT OUT DIA	: 77 mm	: 77 mm
BODY	: PC	: PC


FGPL-47



FGPL-29

WATTAGE	: 9W	: 9W
LxBxH	: 120x120x21 mm	: 120x120x21 mm
COLOUR	: Cool White	: Warm White
CUT OUT DIA	: 102 mm	: 102 mm
BODY	: PC	: PC

FGPL-48




FGPL-30

WATTAGE	: 12W	: 12W
LxBxH	: 144x144x22 mm	: 144x144x22 mm
COLOUR	: Cool White	: Warm White
CUT OUT DIA	: 127 mm	: 127 mm
BODY	: PC	: PC


FGPL-49

FGPL-31



WATTAGE	: 15W	: 15W
LxBxH	: 169x169x22 mm	: 169x169x22 mm
COLOUR	: Cool White	: Warm White
CUT OUT DIA	: 153 mm	: 153 mm
BODY	: PC	: PC

FGPL-50



FGPL-32

WATTAGE	: 18W	: 18W
LxBxH	: 190x190x22 mm	: 190x190x22 mm
COLOUR	: Cool White	: Warm White
CUT OUT DIA	: 178 mm	: 178 mm
BODY	: PC	: PC

FGPL-51



CRI >80




>40,000 Hrs.

Applications : Residential, Small Offices, Service Areas, Retail Shops etc..



# LED ULTRA SLIM SQUARE PANEL




FGPL-34

WATTAGE : 24W  
 LxBxH : 222x222x22 mm  
 COLOUR : Cool White  
 CUT OUT DIA : 203 mm  
 BODY : PC

FGPL-53

WATTAGE : 24W  
 LxBxH : 222x222x22 mm  
 COLOUR : Warm White  
 CUT OUT DIA : 203 mm  
 BODY : PC

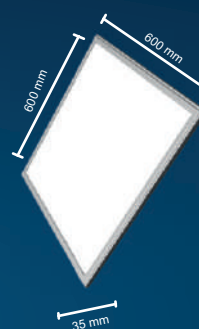


FGPL-35

WATTAGE : 36W  
 LxBxH : 600x600x35 mm  
 COLOUR : Cool White  
 CUT OUT DIA : 585 mm  
 BODY : PC

FGPL-54

WATTAGE : 36W  
 LxBxH : 600x600x35 mm  
 COLOUR : Warm White  
 CUT OUT DIA : 585 mm  
 BODY : PC

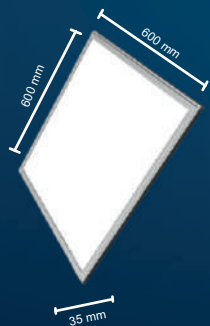

FGPL-36

WATTAGE : 40W  
 LxBxH : 600x600x35 mm  
 COLOUR : Cool White  
 CUT OUT DIA : 585 mm  
 BODY : PC

FGPL-55

WATTAGE : 40W  
 LxBxH : 600x600x35 mm  
 COLOUR : Warm White  
 CUT OUT DIA : 585 mm  
 BODY : PC



FGPL-37

WATTAGE : 48W  
 LxBxH : 600x600x35 mm  
 COLOUR : Cool White  
 CUT OUT DIA : 585 mm  
 BODY : PC

FGPL-56

WATTAGE : 48W  
 LxBxH : 600x600x35 mm  
 COLOUR : Warm White  
 CUT OUT DIA : 585 mm  
 BODY : PC



CRI >80



>40,000 Hrs.

Applications : Residential, Small Offices, Service Areas, Retail Shops etc..





## LED ULTRA SURFACE SQUARE PANEL

FGPL-38



	FGPL-38	FGPL-49
WATTAGE	12W	12W
LxBxH	172x172x35 mm	172x172x35 mm
COLOUR	Cool White	Warm White
BODY	PC	PC

FGPL-49

FGPL-39



	FGPL-39	FGPL-50
WATTAGE	15W	15W
HEIGHT	172x172x35 mm	172x172x35 mm
COLOUR	Cool White	Warm White
BODY	PC	PC

FGPL-50

FGPL-40



	FGPL-40	FGPL-51
WATTAGE	18W	18W
HEIGHT	224x224x35 mm	224x224x35 mm
COLOUR	Cool White	Warm White
BODY	PC	PC

FGPL-51

FGPL-41



	FGPL-41	FGPL-52
WATTAGE	20W	20W
HEIGHT	224x224x35 mm	224x224x35 mm
COLOUR	Cool White	Warm White
BODY	PC	PC

FGPL-52



CRI >80



>40,000 Hrs.

Applications : Residential, Small Offices, Service Areas, Retail Shops etc..



## LED ULTRA SURFACE SQUARE PANEL



FGPL-42

WATTAGE : 24W  
 LxBxH : 224x224x35 mm  
 COLOUR : Cool White  
 BODY : PC

FGPL-53

WATTAGE : 24W  
 LxBxH : 224x224x35 mm  
 COLOUR : Warm White  
 BODY : PC



FGPL-43

WATTAGE : 36W  
 HEIGHT : 600x600x35 mm  
 COLOUR : Cool White  
 BODY : PC

FGPL-54

WATTAGE : 36W  
 HEIGHT : 600x600x35 mm  
 COLOUR : Warm White  
 BODY : PC



FGPL-44

WATTAGE : 40W  
 HEIGHT : 600x600x35 mm  
 COLOUR : Cool White  
 BODY : PC

FGPL-55

WATTAGE : 40W  
 HEIGHT : 600x600x35 mm  
 COLOUR : Warm White  
 BODY : PC



FGPL-45

WATTAGE : 48W  
 HEIGHT : 600x600x35 mm  
 COLOUR : Cool White  
 BODY : PC

FGPL-56

WATTAGE : 48W  
 HEIGHT : 600x600x35 mm  
 COLOUR : Warm White  
 BODY : PC



CRI >80




>40,000 Hrs.

Applications : Residential, Small Offices, Service Areas, Retail Shops etc..



# LED ULTRA SURFACE ROUND PANEL



FGPL-09		FGPL-22	
WATTAGE	: 12W	: 12W	
HEIGHT	: 35 mm	: 35 mm	
DIA	: 177 mm	: 177 mm	
COLOUR	: Cool White	: Warm White	
BODY	: PC	: PC	



FGPL-10		FGPL-23	
WATTAGE	: 15W	: 15W	
HEIGHT	: 35 mm	: 35 mm	
DIA	: 225 mm	: 225 mm	
COLOUR	: Cool White	: Warm White	
BODY	: PC	: PC	



FGPL-11		FGPL-24	
WATTAGE	: 18W	: 18W	
HEIGHT	: 35 mm	: 35 mm	
DIA	: 225 mm	: 225 mm	
COLOUR	: Cool White	: Warm White	
BODY	: PC	: PC	



FGPL-13		FGPL-26	
WATTAGE	: 24W	: 24W	
HEIGHT	: 35 mm	: 35 mm	
DIA	: 300 mm	: 300 mm	
COLOUR	: Cool White	: Warm White	
BODY	: PC	: PC	



CRI >80



>40,000 Hrs.

Applications : Residential, Small Offices, Service Areas, Retail Shops etc..



## LED DEEP ANTI GLARE SQUARE PANEL LIGHT



FGPL-71

WATTAGE : 12W  
 LxBxH : 115x105x105 mm  
 COLOUR : 6500K  
 BODY : Aluminium



FGPL-73

WATTAGE : 18W  
 LxBxH : 150x135x135 mm  
 COLOUR : 6500K  
 BODY : Aluminium



FGPL-75

WATTAGE : 24W  
 LxBxH : 170x160x160 mm  
 COLOUR : 6500K  
 BODY : Aluminium

## LED DEEP ANTI GLARE ROUND PANEL LIGHT



FGPL-70

WATTAGE : 12W  
 HEIGHT : 50 mm  
 DIA : 120 mm  
 COLOUR : 6500K  
 CUT OUT DIA : 115 mm  
 BODY : Aluminium



FGPL-72

WATTAGE : 18W  
 HEIGHT : 50 mm  
 DIA : 155 mm  
 COLOUR : 6500K  
 CUT OUT DIA : 150 mm  
 BODY : Aluminium



FGPL-74

WATTAGE : 24W  
 HEIGHT : 50 mm  
 DIA : 175 mm  
 COLOUR : 6500K  
 CUT OUT DIA : 170 mm  
 BODY : Aluminium



CRI >80



>40,000 Hrs.

Applications : Residential, Small Offices, Service Areas, Retail Shops etc..

## LED ULTRA SLIM ROUND PANEL LIGHT

FGPL-76

WATTAGE : 4W  
 HEIGHT : 16 mm  
 DIA : 80 mm  
 COLOUR : 6500K  
 BODY : Aluminum  
 CUT OUT DIA : 70 mm

FGPL-77

WATTAGE : 15W  
 HEIGHT : 16 mm  
 DIA : 165 mm  
 COLOUR : 6500K  
 BODY : Aluminum  
 CUT OUT DIA : 155 mm

FGPL-78

WATTAGE : 22W  
 HEIGHT : 16 mm  
 DIA : 215 mm  
 COLOUR : 6500K  
 BODY : Aluminum  
 CUT OUT DIA : 200 mm

## LED ULTRA SLIM SQUARE PANEL LIGHT

FGPL-81

WATTAGE : 4W  
 LxBxH : 84x84x15 mm  
 COLOUR : 6500K  
 BODY : Aluminum  
 CUT OUT SIZE : 70x70 mm

FGPL-82

WATTAGE : 15W  
 LxBxH : 162x162x15 mm  
 COLOUR : 6500K  
 BODY : Aluminum  
 CUT OUT SIZE : 150x150 mm

FGPL-83

WATTAGE : 22W  
 LxBxH : 215x215x15 mm  
 COLOUR : 6500K  
 BODY : Aluminum  
 CUT OUT SIZE : 200x200 mm



CRI >80



>40,000 Hrs.

Applications : Residential, Small Offices, Service Areas, Retail Shops etc..



## LED ULTRA SURFACE ROUND PANEL LIGHT

FGPL-79



WATTAGE : 15W  
 HEIGHT : 32 mm  
 DIA : 168 mm  
 COLOUR : 6500K  
 BODY : Aluminum

FGPL-80



WATTAGE : 18W  
 HEIGHT : 32 mm  
 DIA : 215 mm  
 COLOUR : 6500K  
 BODY : Aluminum

## LED ULTRA SURFACE SQUARE PANEL LIGHT

FGPL-84



WATTAGE : 12W  
 LxBxH : 115x115x32 mm  
 COLOUR : 6500K  
 BODY : Aluminum

FGPL-85



WATTAGE : 18W  
 LxBxH : 165x165x32 mm  
 COLOUR : 6500K  
 BODY : Aluminum

FGPL-86



WATTAGE : 24W  
 LxBxH : 215x215x32 mm  
 COLOUR : 6500K  
 BODY : Aluminum



CRI >80



>40,000 Hrs.

Applications : Residential, Small Offices, Service Areas, Retail Shops etc..



## LED STRIKER SLIM SURFACE LIGHT

FGPL-68



WATTAGE	: 5W
HEIGHT	: 15 mm
DIA	: 68 mm
COLOUR	: 6000K
BODY	: Polycarbonate

## FULL GLOW SURFACE STRIKER LIGHT

FGPL-69



WATTAGE	: 5W
HEIGHT	: 18 mm
DIA	: 65 mm
COLOUR	: 6000K
BODY	: Polycarbonate



CRI >80



>40,000 Hrs.

Applications : Residential, Small Offices, Service Area, Retail Shops etc..

## LED BULBS







## LED BULBS

RMLB-03

RMLB-05



WATTAGE	: 7W	7W
HEIGHT	: 110 mm	110 mm
LxB	: 57 mm	57 mm
CAP TYPE	: B22	B22
CCT	: 6000K	3000K

RMLB-03

RMLB-05



WATTAGE	: 9W	9W
HEIGHT	: 110 mm	110 mm
LxB	: 57 mm	57 mm
CAP TYPE	: B22	B22
CCT	: 6000K	3000K

RMLB-01

RMLB-11



WATTAGE	: 12W	12W
HEIGHT	: 120 mm	120 mm
LxB	: 65 mm	65 mm
CAP TYPE	: B22	B22
CCT	: 6000K	3000K

RMLB-01

RMLB-11



WATTAGE	: 15W	15W
HEIGHT	: 120 mm	120 mm
LxB	: 65 mm	65 mm
CAP TYPE	: B22	B22
CCT	: 6000K	3000K

RMLB-04



WATTAGE	: 20W
HEIGHT	: 133 mm
LxB	: 77 mm
CAP TYPE	: B22
CCT	: 6000K

RMLB-06

RMLB-06

RMLB-06



WATTAGE	: 22W	24W	25W
HEIGHT	: 150 mm	150 mm	150 mm
LxB	: 80 mm	80 mm	80 mm
CAP TYPE	: B22	B22	B22
CCT	: 6000K	6000K	6000K



CRI >80



>45,000 Hrs.

Applications : Residential, Small Offices, Service Areas, Retail Shops etc..



RMLB-19

WATTAGE : 30W  
LxBxH : 103x103x192 mm  
CCT : 6000K  
CAP TYPE : B22



RMLB-20

WATTAGE : 40W  
LxBxH : 117x117x215 mm  
CCT : 6000K  
CAP TYPE : B22



RMLB-20

WATTAGE : 50W  
LxBxH : 117x117x215 mm  
CCT : 6000K  
CAP TYPE : B22



RMLB-16

WATTAGE : 10W  
LxBxH : 106x200x30 mm  
CCT : 6000K  
CAP TYPE : B22



RMLB-17

WATTAGE : 15W  
LxBxH : 106x230x30 mm  
CCT : 6000K  
CAP TYPE : B22



RMLB-18

WATTAGE : 20W  
LxBxH : 106x280x30 mm  
CCT : 6000K  
CAP TYPE : B22



CRI >80



>45,000 Hrs.

Applications : Residential, Small Offices, Service Areas, Retail Shops etc..



## LED INVERTER BULBS



	RMLB-14	RMLB-02
WATTAGE	9W	9W
HEIGHT	110 mm	110 mm
DIA	57 mm	57 mm
CCT	6000K	3000K
CAP TYPE	B22	B22
BACKUP	4 Hrs.	4 Hrs.



	RMLB-14	RMLB-02
WATTAGE	12W	12W
HEIGHT	110 mm	110 mm
DIA	57 mm	57 mm
CCT	6000K	3000K
CAP TYPE	B22	B22
BACKUP	4 Hrs.	4 Hrs.



CRI >80



>45,000 Hrs.

Applications : Residential, Small Offices, Service Areas, Retail Shops etc..



## NIGHT LAMPS

**FGNL-01**

WATTAGE : 0.5W  
 HEIGHT : 68 mm  
 DIA : 48 mm  
 BODY : Polycarbonate

**FGNL-02**

WATTAGE : 0.5W  
 HEIGHT : 68 mm  
 DIA : 48 mm  
 BODY : Polycarbonate

**FGNL-03**

WATTAGE : 0.5W  
 HEIGHT : 68 mm  
 DIA : 48 mm  
 BODY : Polycarbonate

**FGNL-04**

WATTAGE : 0.5W  
 HEIGHT : 68 mm  
 DIA : 48 mm  
 BODY : Polycarbonate

**FGNL-05**

WATTAGE : 0.5W  
 HEIGHT : 68 mm  
 DIA : 48 mm  
 BODY : Polycarbonate

**FGNL-06**

WATTAGE : 0.5W  
 HEIGHT : 68 mm  
 DIA : 48 mm  
 BODY : Polycarbonate



CRI >80



>35,000 Hrs.

Applications : Residential, Small Offices, Service Areas, Retail Shops etc..



## TUBE LIGHTS

FGTL-21



WATTAGE	: 5W
LxBxH	: 305x20x40 mm
BODY	: ABS
MODEL	: T5
CCT	: 6500K

FGTL-05



WATTAGE	: 10W
LxBxH	: 610x20x40 mm
BODY	: ABS
MODEL	: T5
CCT	: 6500K

FGTL-06



WATTAGE	: 12W	12W
LxBxH	: 610x20x40 mm	1200x120 mm
BODY	: ABS	ABS
MODEL	: T5	T8
CCT	: 6500K	6500K

FGTL-12

FGTL-02



WATTAGE	: 18W	18W
LxBxH	: 1130x20x40 mm	1200x120 mm
BODY	: ABS	ABS
MODEL	: T5	T8
CCT	: 6500K	6500K

FGTL-08



FGTL-01

WATTAGE	: 20W	20W
LxBxH	: 1170x20x40 mm	1200x120 mm
BODY	: ABS	ABS
MODEL	: T5	T8
CCT	: 6500K	6500K

FGTL-09



FGTL-15

WATTAGE	: 22W	22W
LxBxH	: 1170x20x40 mm	1200x120 mm
BODY	: ABS	ABS
MODEL	: T5	T8
CCT	: 6500K	6500K

FGTL-16



CRI >80



>25,000 Hrs.

Applications : Residential, Small Offices, Service Areas, Retail Shops etc..



FGTL-20



WATTAGE	: 24W	36W
LxBxH	: 1170x20x40 mm	1170x20x40 mm
BODY	: ABS	ABS
MODEL	: T5	T5
CCT	: 6500K	6500K

FGTL-19



FGTL-19

WATTAGE	: 40W	72W
LxBxH	: 1170x20x40 mm	1170x20x40 mm
BODY	: ABS	ABS
MODEL	: T5	T5
CCT	: 6500K	6500K

FGTL-18

## INVERTER TUBE LIGHT

FGTL-13



WATTAGE	: 20W
LxBxH	: 1170x20x40 mm
BODY	: ABS
MODEL	: T5
CCT	: 6500K
BACKUP	: 3 Hrs.

FGTL-22



WATTAGE	: 10W
LxBxH	: 590x20x40 mm
BODY	: ABS
MODEL	: T5
CCT	: 6500K
BACKUP	: 3 Hrs.




CRI >80



>25,000 Hrs.

Applications : Residential, Small Offices, Service Areas, Retail Shops etc..

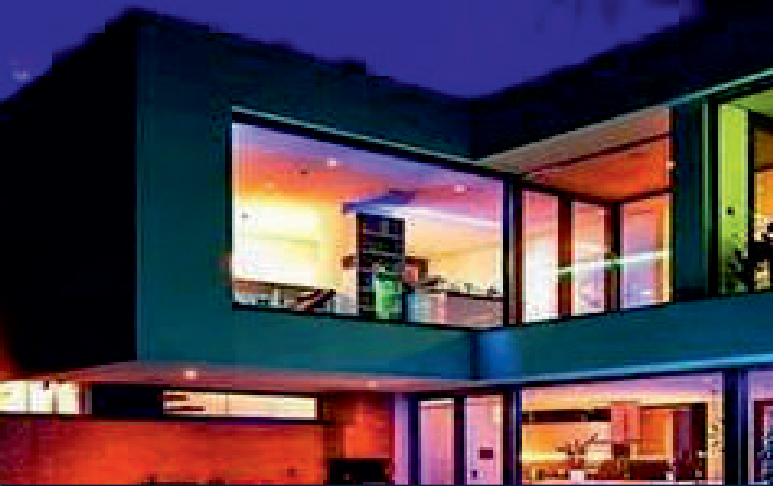

## LED ROPE LIGHT

FGRL-01

FGRL-02



LED	: 2835	2835
WATTAGE	: 6W/Mtr.	6W/Mtr.
LENGTH	: 50 Mtr.	50 Mtr.
MODEL	: Pipe Type	Pipe Type

FGRL-03

FGRL-04



LED	: 5050	5050
WATTAGE	: 6W/Mtr.	6W/Mtr.
LENGTH	: 50 Mtr.	50 Mtr.
MODEL	: Pipe Type	Pipe Type

FGRL-05

FGRL-06



LED	: 2825	2835
WATTAGE	: 8W/Mtr.	8W/Mtr.
LENGTH	: 50 Mtr.	50 Mtr.
MODEL	: Neon Strip	Neon Strip

FGRL-07

FGRL-08



LED	: 5050	5050
WATTAGE	: 8W/Mtr.	8W/Mtr.
LENGTH	: 50 Mtr.	50 Mtr.
MODEL	: Neon Strip	Neon Strip

FGRL-09

FGRL-10



LED	: 2835	2835
WATTAGE	: 5W/Mtr.	5W/Mtr.
LENGTH	: 5 Mtr.	5 Mtr.
MODEL	: Strip Type	Strip Type

FGRL-11

FGRL-12



LED	: 5050	5050
WATTAGE	: 5W/Mtr.	5W/Mtr.
LENGTH	: 5 Mtr.	5 Mtr.
MODEL	: Strip Type	Strip Type



CRI >80



>25,000 Hrs.



COLOUR TEMP.  
Red, Green, Blue, Yellow, Orange

Applications : Residential, Small Offices, Service Areas, Retail Shops etc..



# COB Grille Light

6W - COB Grille Light



MaterialSize : 115 x 22 x 25 mm (LxWxH)  
Light Source : Osram LED  
LED CCT : 3000k, 4000k  
Body Color : Black  
Voltage : AC 220V, DC 48V  
Housing : Matt Black  
Material : Aluminum Alloy

12w - COB Grille Light



MaterialSize : 223 x 22 x 25 mm (LxWxH)  
Light Source : Osram LED  
LED CCT : 3000k, 4000k  
Body Color : Black  
Voltage : AC 220V, DC 48V  
Housing : Matt Black  
Material : Aluminum Alloy

18w - COB Grille Light



MaterialSize : 331 x 22 x 25 mm (LxWxH)  
Light Source : Osram LED  
LED CCT : 3000k, 4000k  
Body Color : Black  
Voltage : AC 220V, DC 48V  
Housing : Matt Black  
Material : Aluminum Alloy

24W - COB Grille Light



MaterialSize : 439 x 22 x 25 mm (LxWxH)  
Light Source : Osram LED  
LED CCT : 3000k, 4000k  
Body Color : Black  
Voltage : AC 220V, DC 48V  
Housing : Matt Black  
Material : Aluminum Alloy

30w - COB Grille Light



MaterialSize : 547 x 22 x 25 mm (LxWxH)  
Light Source : Osram LED  
LED CCT : 3000k, 4000k  
Body Color : Black  
Voltage : AC 220V, DC 48V  
Housing : Matt Black  
Material : Aluminum Alloy



CRI >80



>35,000 Hrs.

Applications : Residential, Small Offices, Service Areas, Retail Shops etc..





## COB Track Light

30W - COB Track Light



MaterialSize : 48 x 105 mm  
Light Source : Osram LED  
LED CCT : 3000k, 4000k  
Body Color : Black  
Voltage : AC 220V, DC 48V  
Housing : Matt Black  
Material : Aluminum Alloy



6W - COB Magnetic Pendant

MaterialSize : 30 x 300 mm  
Light Source : Osram LED  
LED CCT : 3000k, 4000k  
Body Color : Black  
Voltage : AC 220V, DC 48V  
Housing : Matt Black  
Material : Aluminum Alloy



12W - COB Magnetic Pendant

MaterialSize : 60 x 300 mm  
Light Source : Osram LED  
LED CCT : 3000k, 4000k  
Body Color : Black  
Voltage : AC 220V, DC 48V  
Housing : Matt Black  
Material : Aluminum Alloy



CRI >80



>35,000 Hrs.

Applications : Residential, Small Offices, Service Areas, Retail Shops etc..

# LED OUTDOOR LIGHTS





# GM MODEL FLOOD LIGHT

FGFL-106



WATTAGE	: 30W	50W	60W
LxBxH	: 175x175x40 mm	220x230x50 mm	220x230x50 mm
CCT	: 6000K	6000K	6000K
Lumen/W	: 100lm/w	100lm/w	100lm/w
Input Voltage	: 90-300V	90-300V	90-300V
PF	: 0.95	0.95	0.95

FGFL-91

FGFL-91



FGFL-90

FGFL-90

WATTAGE	: 100W	120W
LxBxH	: 220x230x45 mm	220x230x45 mm
CCT	: 6000K	6000K
Lumen/W	: 100lm/w	100lm/w
Input Voltage	: 90-300V	90-300V
PF	: 0.95	0.95

FGFL-98



WATTAGE	: 200W	240W
LxBxH	: 335x315x60 mm	335x315x60 mm
CCT	: 6000K	6000K
Lumen/W	: 100lm/w	100lm/w
Input Voltage	: 90-300V	90-300V
PF	: 0.95	0.95

FGFL-97



CRI >80



>50,000 Hrs.

Applications : Stadium, Park, Street, Resident etc..



## GM MODEL FLOOD LIGHT




FGFL-94

FGFL-37

FGFL-39

FGFL-41

WATTAGE :	300W	350W	400W	500W
LxBxH :	380x370x60 mm	380x370x60 mm	380x370x60 mm	460x495x60 mm
CCT :	6000K	6000K	6000K	6000K
Lumen/W :	100lm/w	100lm/w	100lm/w	100lm/w
Input Voltage :	90-300V	90-300V	90-300V	90-300V
PF :	0.95	0.95	0.95	0.95



FGFL-107

FGFL-107

FGFL-108

FGFL-84

FGFL-84

WATTAGE :	600W	700W	750W	900W	1050W
LxBxH :	350x480x140 mm	350x480x140 mm	350x480x140 mm	390x510x160 mm	390x510x160 mm
CCT :	6000K	6000K	6000K	6000K	6000K
Lumen/W :	100lm/w	100lm/w	100lm/w	100lm/w	100lm/w
Input Voltage :	90-300V	90-300V	90-300V	90-300V	90-300V
PF :	0.95	0.95	0.95	0.95	0.95



CRI >80



>50,000 Hrs.

Applications : Stadium, Park, Street, Resident etc..



## LED RGB FLOOD LIGHT



FGFL-111

FGFL-76

FGFL-110

WATTAGE	: 50W	100W	120W
LxBxH	: 220x230x50 mm	220x230x50 mm	220x230x50 mm
CCT	: 6000K	6000K	6000K
Lumen/W	: 100lm/w	100lm/w	100lm/w
Input Voltage	: 90-300V	90-300V	90-300V
PF	: 0.95	0.95	0.95

## CANOPY FLOOD LIGHT



FGFL-79

FGFL-75

WATTAGE	: 80W	100W
LxBxH	: 375x375x100 mm	375x375x100 mm
CCT	: 6000K	6000K
Lumen/W	: 100lm/w	100lm/w
Input Voltage	: 90-300V	90-300V
PF	: 0.95	0.95



CRI >80




>50,000 Hrs.

Applications : Stadium, Park, Street, Resident etc..



## LM MODEL FLOOD LIGHT

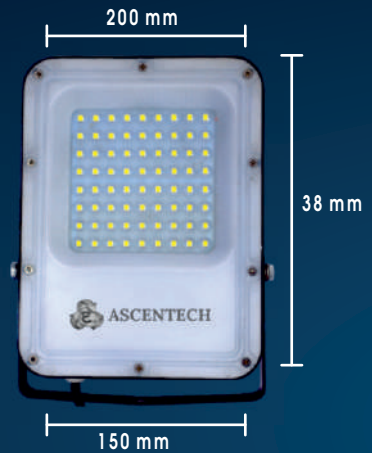

FGFL-57

FGFL-57

FGFL-59

FGFL-59

FGFL-66


FGFL-66

FGFL-60

FGFL-60

FGFL-61

WATTAGE	: 15W	18W	24W	25W	32W	36W	45W	50W	60W
LxBxH	: 200x150x38 mm	200x150x38 mm	200x150x38 mm	200x150x38 mm	200x150x38 mm	200x150x38 mm	200x150x38 mm	200x150x38 mm	200x150x38 mm
CCT	: 6000K	6000K	6000K	6000K	6000K	6000K	6000K	6000K	6000K
Lumen/W	: 100lm/w	100lm/w	100lm/w	100lm/w	100lm/w	100lm/w	100lm/w	100lm/w	100lm/w
Input Voltage	: 90-300V	90-300V	90-300V	90-300V	90-300V	90-300V	90-300V	90-300V	90-300V
PF	: 0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95

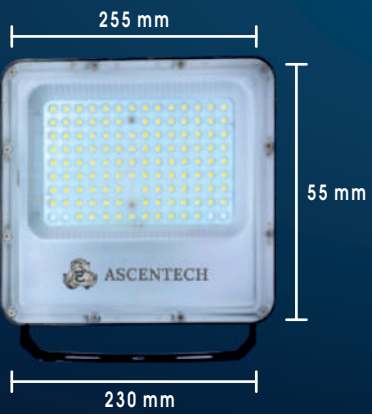

FGFL-103

FGFL-65

FGFL-65

FGFL-72

FGFL-72

FGFL-67

WATTAGE	: 70W	90W	100W	110W	120W	150W
LxBxH	: 220x230x45 mm	220x230x45 mm	220x230x45 mm	220x230x45 mm	220x230x45 mm	220x230x45 mm
CCT	: 6000K	6000K	6000K	6000K	6000K	6000K
Lumen/W	: 100lm/w	100lm/w	100lm/w	100lm/w	100lm/w	100lm/w
Input Voltage	: 90-300V	90-300V	90-300V	90-300V	90-300V	90-300V
PF	: 0.95	0.95	0.95	0.95	0.95	0.95



CRI >80



>50,000 Hrs.

Applications : Stadium, Park, Street, Resident etc..



## LED LM STREET LIGHT

FGSL-66

FGSL-66

FGSL-67

FGSL-63

FGSL-61

WATTAGE :	25W	30W	40W	45W	50W
LxBxH :	210x120x60 mm	210x120x60 mm	210x120x60 mm	210x120x60 mm	210x120x60 mm
CCT :	6000K	6000K	6000K	6000K	6000K
Lumen/W :	100lm/w	100lm/w	100lm/w	100lm/w	100lm/w
Input Voltage :	90-300V	90-300V	90-300V	90-300V	90-300V
DIA ID :	Flexible	Flexible	Flexible	Flexible	Flexible



FGSL-96

FGSL-96

FGSL-96

WATTAGE :	70W	90W	100W
LxBxH :	210x120x60 mm	210x120x60 mm	210x120x60 mm
CCT :	6000K	6000K	6000K
Lumen/W :	100lm/w	100lm/w	100lm/w
Input Voltage :	90-300V	90-300V	90-300V
DIA ID :	68	68	68



CRI >80



>50,000 Hrs.

Applications : Stadium, Park, Street, Resident etc..

# LED GM STREET LIGHT



FGSL-53

	FGSL-53	FGSL-53	FGSL-53	FGSL-22	FGSL-33	FGSL-33	FGSL-34	FGSL-34	FGSL-34	FGSL-87
WATTAGE :	15W	18W	24W	25W	36W	40W	45W	48W	50W	60W
LxBxH :	305x95x50 mm	305x95x50 mm	305x95x50 mm	305x95x50 mm	305x95x50 mm	305x95x50 mm	305x95x50 mm	305x95x50 mm	305x95x50 mm	305x95x50 mm
CCT :	6000K	6000K	6000K	6000K	6000K	6000K	6000K	6000K	6000K	6000K
Lumen/W :	100lm/w	100lm/w	100lm/w	100lm/w	100lm/w	100lm/w	100lm/w	100lm/w	100lm/w	100lm/w
Input Voltage :	90-300V	90-300V	90-300V	90-300V	90-300V	90-300V	90-300V	90-300V	90-300V	90-300V
DIA ID :	39	39	39	39	39	39	39	39	39	39



FGSL-48

WATTAGE :	70W
LxBxH :	305x95x60 mm
CCT :	6000K
Lumen/W :	100lm/w
Input Voltage :	90-300V
DIA ID :	47



FGSL-42

	FGSL-42	FGSL-41	FGSL-41	
WATTAGE :	90W	100W	110W	120W
LxBxH :	320x145x60 mm	320x145x60 mm	320x145x60 mm	320x145x60 mm
CCT :	6000K	6000K	6000K	6000K
Lumen/W :	100lm/w	100lm/w	100lm/w	100lm/w
Input Voltage :	90-300V	90-300V	90-300V	90-300V
DIA ID :	52	52	52	52



CRI >80



>50,000 Hrs.

Applications : Stadium, Park, Street, Resident etc..






# LED HIGHBAY LIGHT



FGHB-17

FGHB-17


WATTAGE	: 50W	80W
CCT	: 6000K	6000K
Height	: 170 mm	170 mm
Fixture Dia	: 215 mm	215 mm



FGHB-18

FGHB-18

WATTAGE	: 100W	120W
CCT	: 6000K	6000K
Height	: 170 mm	170 mm
Fixture Dia	: 215 mm	215 mm

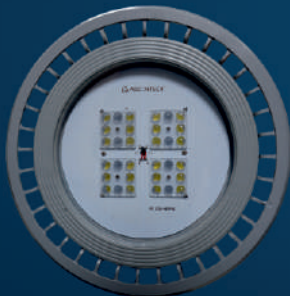

FGHB-04

FGHB-04

FGHB-04

FGHB-06

FGHB-06

WATTAGE	: 130W	140W	150W	180W	200W
CCT	: 6000K	6000K	6000K	6000K	6000K
Height	: 170 mm	170 mm	170 mm	170 mm	170 mm
Fixture Dia	: 215 mm	215 mm	215 mm	215 mm	215 mm



FGHB-15

FGHB-15

FGHB-13

FGHB-16

WATTAGE	: 240W	250W	300W	400W
CCT	: 6000K	6000K	6000K	6000K
Height	: 170 mm	230 mm	230 mm	230 mm
Fixture Dia	: 215 mm	255 mm	255 mm	255 mm



CRI >80



>50,000 Hrs.

Applications : Manufacturing Plant, Factory, Power Sheds, etc..



## UNDERWATER LIGHT

FGUW-03



WATTAGE : 9W  
Height : 46 mm  
Upper Dia : 95 mm  
Lumen/W : 100lm/w  
Input Voltage : 90-300V

FGUW-01



WATTAGE : 18W  
Height : 46 mm  
Upper Dia : 125 mm  
Lumen/W : 100lm/w  
Input Voltage : 90-300V

FGUW-03



WATTAGE : 36W  
Height : 80 mm  
Upper Dia : 160 mm  
Lumen/W : 100lm/w  
Input Voltage : 90-300V

FGUW-07



WATTAGE : 36W  
Height : 80 mm  
Upper Dia : 160 mm  
Lumen/W : 100lm/w  
Input Voltage : 90-300V



CRI >80



>50,000 Hrs.

Applications : Swimming Pools, Water Parks, Fountains etc..




# FLAMEPROOF FLOOD LIGHT



	FGFP-01	FGFP-02	FGFP-02	FGFP-03	FGFP-04
WATTAGE	40W	45W	50W	60W	70W
CCT	6000K	6000K	6000K	6000K	6000K
Height	240 mm	240 mm	240 mm	240 mm	240 mm
Fixture Dia	300 mm	300 mm	300 mm	300 mm	300 mm



	FGFP-08	FGFP-09
WATTAGE	150W	200W
CCT	6000K	6000K
Height	290 mm	290 mm
Fixture Dia	600 mm	600 mm

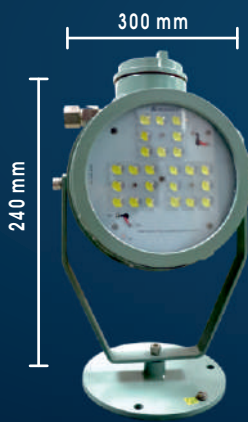

	FGFP-06	FGFP-06	FGFP-07
WATTAGE	80W	100W	120W
CCT	6000K	6000K	6000K
Height	240 mm	240 mm	240 mm
Fixture Dia	300 mm	300 mm	300 mm



CRI >80



>50,000 Hrs.

Applications : Coal Fields, Industrial Sector, Petroleum Plant etc..



# WELL GLASS LIGHT



	FGWG-06	FGWG-06	FGWG-01	FGWG-02	FGWG-03	FGWG-15	FGWG-11	FGWG-04	FGWG-10
WATTAGE :	25W	30W	35W	40W	42W	50W	60W	70W	75W
HEIGHT :	110 mm	110 mm	110 mm	110 mm	110 mm	110 mm	110 mm	110 mm	150 mm
DIA :	130 mm	130 mm	130 mm	130 mm	130 mm	130 mm	130 mm	130 mm	200 mm
CCT :	6000K	6000K	6000K	6000K	6000K	6000K	6000K	6000K	6000K
Input Voltage :	90-300V	90-300V	90-300V	90-300V	90-300V	90-300V	90-300V	90-300V	90-300V
DIFFUSER :	PC	PC	PC	PC	PC	PC	PC	PC	PC



CRI >80



>50,000 Hrs.

Applications : Coal Fields, Petroleum Plants, etc..



## EXIT LIGHTS



FGEL-24

WATTAGE	: 10W	10W
LxBxH	: 300x130x30 mm	300x130x30 mm
COLOUR	: GREEN	GREEN

FGEL-43



FGEL-25

WATTAGE	: 20W
LxBxH	: 300x130x30 mm
COLOUR	: GREEN



FGEL-03

WATTAGE	: 40W
LxBxH	: 300x200x300 mm
COLOUR	: Red + Warm White



CRI >80



>50,000 Hrs.

Applications : Airports, Hotels, Malls, Metro, Railway Station etc..



# SPIKE LIGHTS



FGSP-04

WATTAGE	: 5W	5W	5W	5W
HEIGHT	: 250 mm	250 mm	250 mm	250 mm
UPPER DIA	: 60 mm	60 mm	60 mm	60 mm
LOWER DIA	: 5 mm	5 mm	5 mm	5 mm
COLOUR	: RED	BLUE	GREEN	WARM WHITE

FGSP-05

FGSP-06

FGSP-07



FGSP-03

WATTAGE	: 10W	10W
HEIGHT	: 280 mm	280 mm
UPPER DIA	: 75 mm	75 mm
LOWER DIA	: 8 mm	8 mm
COLOUR	: WARM WHITE	COOL WHITE

FGSP-08



FGSP-01

WATTAGE	: 15W
HEIGHT	: 280 mm
UPPER DIA	: 75 mm
LOWER DIA	: 8 mm
COLOUR	: WARM WHITE




CRI >80



>30,000 Hrs.

Applications : Garden, Park, Residential, Nursery, etc..

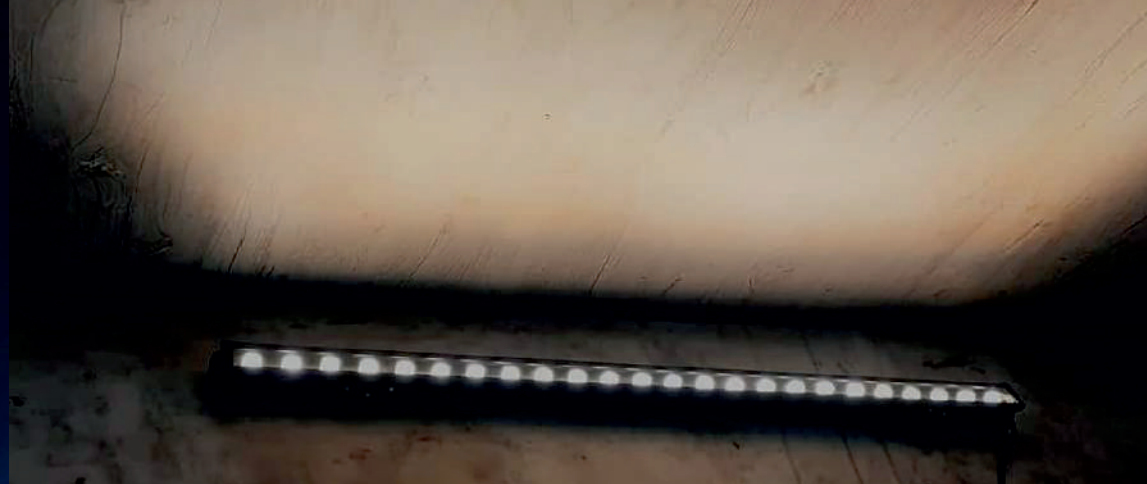

## WALL WASHER LIGHT



FGWW-01

FGWW-01

WATTAGE	: 36W	40W
LxBxH	: 120x80x80 mm	120x80x80 mm
PF	: 0.95	0.95
Lumen/W	: 100lm/w	100lm/w
Input Voltage	: 90-300V	90-300V

## PAR LIGHTS

FGDJ-08

FGDJ-09



WATTAGE	: 100W	100W
HEIGHT	: 300 mm	300 mm
DIA	: 300 mm	300 mm
COLOUR	: Multi Colour	Multi Colour



FGDJ-08

FGDJ-09

WATTAGE	: 150W	150W
HEIGHT	: 300 mm	300 mm
DIA	: 300 mm	300 mm
COLOUR	: Multi Colour	Multi Colour



CRI >80



>30,000 Hrs.

Applications : Garden, Park, Residential, Nursery, etc..

# BOLLARD LIGHT







FGBL-10

WATTAGE : 15W  
 HEIGHT : 610 mm  
 L X B : 110 x 110 mm  
 CCT : 3000K  
 MATERIAL : Aluminium



FGBL-06

WATTAGE : 15W  
 HEIGHT : 1000 - 1500 mm  
 DIA : 600 x 88 mm  
 CCT : 3000K - 6000K  
 MATERIAL : Aluminium

FGBL-04

18W  
 1000 - 1500 mm  
 600 x 88 mm  
 3000K - 6000K  
 Aluminium



FGBL-09

WATTAGE : 20W  
 HEIGHT : 1000 mm  
 DIA : 88 mm  
 COLOUR : 3000K - 6000K  
 MATERIAL : Aluminium



FGBL-01

WATTAGE : 10W | 15W  
 HEIGHT : 610 - 914 mm | 610 - 914 mm  
 DIA : 88 mm | 88 mm  
 CCT : 3000k - 6000K | 3000K - 6000K  
 MATERIAL : Aluminium | Aluminium

FGBL-02



FGBL-07

WATTAGE : 10W  
 HEIGHT : 610 mm  
 DIA : 110 mm  
 CCT : 3000K - 6000K  
 MATERIAL : Aluminium



FGBL-08

WATTAGE : 20W  
 HEIGHT : 610 - 914 - 1000 mm  
 DIA : 88 mm  
 CCT : 3000K - 6000K  
 MATERIAL : Aluminium



CRI >80



>35,000 Hrs.

Applications : Parks, Gardens, Residents, etc..

## POST TOP LIGHT





FGPT-01



FGPT-05

WATTAGE : 20W	20W
HEIGHT : 370 mm	370 mm
UPPER DIA : 900 mm	900 mm
LOWER DIA : 100 mm	100 mm
POLE OD : 75 mm	75 mm
CCT : 6000K	6000K
DIFFUSER : Clear	Milky

FGPT-02



FGPT-06

WATTAGE : 40W	40W
HEIGHT : 370 mm	370 mm
UPPER DIA : 900 mm	900 mm
LOWER DIA : 100 mm	100 mm
POLE OD : 75 mm	75 mm
CCT : 6000K	6000K
DIFFUSER : Clear	Milky

FGPT-03



FGPT-07

WATTAGE : 45W	45W
HEIGHT : 370 mm	370 mm
UPPER DIA : 1100 mm	1100 mm
LOWER DIA : 150 mm	150 mm
POLE OD : 70 mm	70 mm
CCT : 6000K	6000K
DIFFUSER : Clear	Milky

FGPT-04



FGPT-08

WATTAGE : 60W	60W
HEIGHT : 370 mm	370 mm
UPPER DIA : 1100 mm	1100 mm
LOWER DIA : 150 mm	150 mm
POLE OD : 70 mm	70 mm
CCT : 6000K	6000K
DIFFUSER : Clear	Milky




CRI >80




>25,000 Hrs.

Applications : Parks, Gardens, Residents, etc..

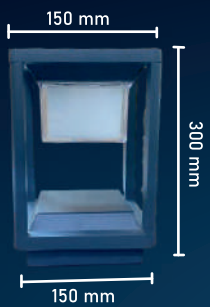

FGPT-11

WATTAGE : 15W  
LxBxH : 150x150x300 mm  
COLOUR : Cool White  
BODY : Aluminium

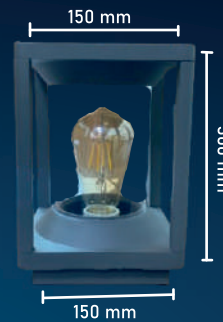

FGPT-09

WATTAGE : 15W  
LxBxH : 150x150x300 mm  
COLOUR : Warm White  
BODY : Aluminium



FGPT-10

WATTAGE : 25W  
HEIGHT : 400 mm  
UPPER DIA : 900 mm  
LOWER DIA : 85 mm  
POLE OD : 85 mm  
COLOUR : Cool White



CRI >80



>25,000 Hrs.

Applications : Parks, Gardens, Residents, etc..

# EMERGENCY LIGHTS





# PORTABLE EMERGENCY LIGHTING SYSTEM TOWER TYPE AC GENSET

FGEL-26

1 KVA

FGEL-41

2 KVA

FGEL-39

3 KVA

Rating Of Generator Set (In KVA)	: 1 KVA
Number Of Cylinder In The Engine	: 1
Minimum Continuous Working Hours	: 5Hour
Gen Set Fuel Tank Capacity (Minimum) - In Litres	: 3.5
Type Of Fuel	: Petrol
Minimum System Lumens	: 50000
Material Of Tower	: Galvanised Iron/Mild steel
Minimum Height Of Tower:	: 4M
Type Of Mounting	: With trolley

Rating Of Generator Set (In KVA)	: 2 KVA
Number Of Cylinder In The Engine	: 1
Minimum Continuous Working Hours	: 12 Hour
Gen Set Fuel Tank Capacity (Minimum) - In Litres	: 9.5
Type Of Fuel	: Petrol
Minimum System Lumens	: 60000-80000
Material Of Tower	: Galvanised Iron/Mild steel
Minimum Height Of Tower:	: 4M
Type Of Mounting	: With trolley

Rating Of Generator Set (In KVA)	: 3 KVA
Number Of Cylinder In The Engine	: 1
Minimum Continuous Working Hours	: 12 - 18 Hour
Gen Set Fuel Tank Capacity (Minimum) - In Litres	: 20
Type Of Fuel	: Petrol
Minimum System Lumens	: 60000 - 80000
Material Of Tower	: Galvanised Iron/Mild steel
Minimum Height Of Tower:	: 4M
Type Of Mounting	: With trolley



Applications : Construction Sites, Gardens, Coal Fields, etc..



# PORTABLE EMERGENCY LIGHTING SYSTEM TOWER TYPE AC GENSET

FGEL-27

5 KVA

Rating Of Generator Set (In KVA)	: 5 KVA
Number Of Cylinder In The Engine	: 1
Minimum Continuous Working Hours	: 12 - 30 Hour
Gen Set Fuel Tank Capacity (Minimum) - In Litres	: 15 - 25
Type Of Fuel	: Diesel
Minimum System Lumens	: 80000 - 150000
Material Of Tower	: Galvanised Iron/Mild steel
Minimum Height Of Tower:	: 7-9M
Type Of Mounting	: With trolley



FGEL-28

7.5 KVA

Rating Of Generator Set (In KVA)	: 7.5 KVA
Number Of Cylinder In The Engine	: 2
Minimum Continuous Working Hours	: 12 - 30 Hour
Gen Set Fuel Tank Capacity (Minimum) - In Litres	: 15 - 40
Type Of Fuel	: Diesel
Minimum System Lumens	: 80000-150000
Material Of Tower	: Galvanised Iron/Mild steel
Minimum Height Of Tower:	: 7-9M
Type Of Mounting	: With trolley



Applications : Construction Sites, Gardens, Coal Fields, etc..



# REMOTE AREA LIGHTING SYSTEM

FGEL-07

SINGLE POLE

FGEL-34

DOUBLE POLE

FGEL-33

FOUR POLE

Minimum System Lumen	:	5000
Minimum Continuous Working Hours	:	15 Hours
Chemistry Of Battery	:	Li-ion
Battery Voltage	:	12V
Battery Capacity	:	60AH
Minimum Height Of Tower	:	> 2 Mtr.
Material Of Tower	:	Aluminum
Protection Of The Entire Housing	:	IP66
Operating Temperature Range	:	-20 deg. C to +50 deg. C

Minimum System Lumen	:	5000*2
Minimum Continuous Working Hours	:	8 - 15 Hours
Chemistry Of Battery	:	Li-ion
Battery Voltage	:	12V
Battery Capacity	:	60AH - 90AH
Minimum Height Of Tower	:	>2 Mtr.
Material Of Tower	:	Aluminum
Protection Of The Entire Housing	:	IP66
Operating Temperature Range	:	-20 deg. C to +50 deg. C

Minimum System Lumen	:	5000*4
Minimum Continuous Working Hours	:	8 Hours
Chemistry Of Battery	:	Li-ion
Battery Voltage	:	12V
Battery Capacity	:	93AH
Minimum Height Of Tower	:	>2 Mtr.
Material Of Tower	:	Aluminum
Protection Of The Entire Housing	:	IP66
Operating Temperature Range	:	-20 deg. C to +50 deg. C



Applications : Construction Sites, Gardens, Coal Fields, etc..





**FGEL-20**

**EMERGENCY LIGHT WITH TRIPOD STAND**



Body Material	:	ALUMINIUM
Power	:	80 - 400 W
HEIGHT	:	3 Mtr.
Lightening Color	:	Cool White
Lighting Type	:	High Intensity Discharge LED
IP Rating	:	IP 66
Working Voltage	:	90 - 300VAC, 50 - 60Hz
Features	:	Easy Installation on concrete roof Used for Searching
Beam Range	:	400+ Metres
PF	:	>0.95
Rotate	:	360°
CCT	:	5500K-6000K
CRI	:	>70
EFFICACY	:	100 lm/W
Optical Grade	:	Reflector / Lens
Narrow Beam	:	10° - 20°
Reflector/Lens Efficiency	:	>90%




**FGEL-47**

**FLOOD LIGHT WITH TRIPOD STAND**

Body Material	:	ALUMINIUM
Power	:	80 - 400 W
HEIGHT	:	3 Mtr.
Lightening Color	:	Cool White
Lighting Type	:	High Intensity Discharge LED
IP Rating	:	IP 66
Working Voltage	:	90 - 300VAC, 50 - 60Hz
Features	:	Easy Installation on concrete roof Used for Searching
Beam Range	:	400+ Metres
PF	:	>0.95
Rotate	:	360°
CCT	:	5500K-6000K
CRI	:	>70
EFFICACY	:	100 lm/W
Optical Grade	:	Reflector / Lens
Narrow Beam	:	10° - 20°
Reflector/Lens Efficiency	:	>90%

Applications : Construction Sites, Gardens, Coal Fields, etc..

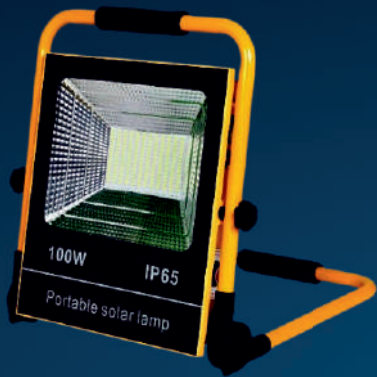

100W Rechargeable Flood Light



Magnetic Rechargeable Flood Light



Tripod Rechargeable Flood Light



50W Rechargeable Flood Light

#### Rechargeable Flood Light

Brand	: Ascentech
Color	: White, Cool White 6500k
Material	: Aluminium
Style	: Modern
Light Fixture Form	: Floodlight
Room Type	: Any
Specific Uses for Product	: Both Indoor and Outdoor
Power Source	: Battery Powered
Installation Type	: Portable Freestanding Light
Special Feature	: Cordless
Control Method	: Remote
Light Source Type	: LED
Finish Type	: Powder Coated
Shade Material	: Toughened Glass
No. of Light Source	: 1
Voltage	: 5 Volts (DC)
Light Color	: Milky White
Lighting Method	: Adjustable

Applications : Construction Sites, Gardens, Coal Fields, etc..



**FGEL-38**

**FIELD MOTORIZED REVOLVING SEARCH LIGHT**

Body Material	: ALUMINIUM
Power	: 250 - 300W
Lightening Colour	: Cool White
Lighting Type	: High Intensity Discharge LED
IP Rating	: IP 66
Working Voltage	: 90 - 300VAC, 50 - 60Hz
Features	: High Narrow Beam, Protection from High/Low Volts
Beam Range	: 500 - 600 Metres
PF	: >0.95
Horizontal Rotation	: 360°
Vertical Tilting	: Upto 45°
Rotation Speed	: 01-10 RPM
CCT	: 5500K-6000K
Optical Grade	: Reflector/Lens
Reflector/Lens Efficiency	: >90%
(With Control Panel and Remote)	



**FGEL-17**

**VEHICLE MOUNTED REVOLVING SEARCH LIGHT**

LED	: 50W (5w x 10)
Operating Voltage	: 12V DC (With DC/ Car Cigarette Lighter Socket)
Operating Options	: Through Wireless remote control with Left, Right, Up & Down functions
Colour/Material	: Black/Polycarbonate
Beam Distance	: Upto 500m Approx in clear weather
Lift time in Hours	: 50,000 hour (Approx)
Rotation	: Horizontal 360° & Vertical 90°
Base	: Heavy Magnet base for stability
Weight	: Around 4 Kgs (w/o battery)
Dimension	: 26 x 20.5 x 18 cms
Handle	: Provided on the Top

Applications : Construction Sites, Gardens, Coal Fields, etc..



### FGEL-19

### HIGHBAY MOTORIZED REVOLVING LIGHT



Body Material	:	ALUMINIUM
Power	:	80 – 400 W
Lightening Color	:	Cool White
Lighting Type	:	High Intensity Discharge LED
IP Rating	:	IP 66
Working Voltage	:	90 – 300VAC, 50 – 60Hz
Features	:	Easy Installation on concrete roof Used for Searching
Beam Range	:	400+ Metres
PF	:	>0.95
Rotate	:	360°
Rotation Speed	:	02 RPM
CCT	:	5500K-6000K
Optical Grade	:	Reflector / Lens
Narrow Beam	:	10° – 20°
Reflector/Lens Efficiency	:	>90%

### FGEL-18

### HIGHBAY MANUAL REVOLVING LIGHT



Body Material	:	ALUMINIUM
Power	:	80 – 400 W
Lightening Color	:	Cool White
Lighting Type	:	High Intensity Discharge LED
IP Rating	:	IP 66
Working Voltage	:	90 – 300VAC, 50 – 60Hz
Features	:	Easy Installation on concrete roof Used for Searching
Beam Range	:	400+ Metres
PF	:	>0.95
Rotate	:	360°
Rotation Speed	:	02 RPM
CCT	:	5500K-6000K
Optical Grade	:	Reflector / Lens
Narrow Beam	:	10° – 20°
Reflector/Lens Efficiency	:	>90%



## HIGHBAY LIGHT WITH TRIPOD STAND



### FGEL-21

Body Material	:	ALUMINIUM
Power	:	250W
Lightening Color	:	Cool White
Lighting Type	:	High Intensity Discharge LED
IP Rating	:	IP 66
Working Voltage	:	90-300VAC, 50-60Hz
Features	:	High Narrow Beam, Protection from High/Low Volts
Beam Range	:	400+ Meters
PF	:	>0.95
Rotate	:	360°
Minimum height of Tower	:	3M
CCT	:	5500K-6000K
Optical Grade	:	Reect or/Lens
Narrow Beam	:	10° - 20°
Reflector/Lens Efficiency	:	>90%

Applications : Construction Sites, Gardens, Coal Fields, etc..



## 500 Mtr. Range Revolving Search Light



### FGEL-21

Body Material	:	ALUMINIUM
Power	:	250 - 300W
Lightening Color	:	Cool White
Lighting Type	:	High Intensity Discharge LED
IP Rating	:	IP 66
Working Voltage	:	90-300VAC, 50-60Hz
Features	:	High Narrow Beam, Protection from High/Low Volts
Beam Range	:	500+ Meters
PF	:	>0.95
Rotate	:	360°
Height of Tower	:	4M
CCT	:	5500K-6000K
Optical Grade	:	Reect or/Lens
Narrow Beam	:	10° - 20°
Reflector/Lens Efficiency	:	>90%

Applications : Construction Sites, Gardens, Coal Fields, etc..



## HELIPAD LIGHT

FGHP-02



Light Source	:	Ultra High Intensity LED
No. of LEDs	:	4 LEDs (2 White LEDs & 2 RGB LEDs)
Input Charging Voltage	:	220 V AC, 50 Hz
CRI (Ra)	:	> 70 (For white LEDs)
Height	:	12 Inch
Length	:	8 Inch
Width	:	8 Inch
Weight	:	4.5 Kg
Body Color	:	Yellow
Body Material	:	Mild Steel
Operation Mode	:	30 Hours
Operating Voltage	:	5V DC
Horizontal Output	:	360 degree
No. of Modes of Light	:	Four Modes (White Light, Blue Light, Green Light, Red Light)
Flash Characteristics	:	Instant Burning
Wind Speed (m/s)	:	225
Humidity	:	10-90 %
LED Life Hours (Minimum)	:	50000 Hours
IP Rating	:	Ip67
Ambient Temperature	:	-20 to 55 degree C
Circuit Protection	:	Integrated

Applications : Helipad, Grounds, etc..

# TORCH & BATON





# HAND HELD SEARCH LIGHT

## FGHH-36



Type of lamp	:	LED
Battery capacity (AH)	:	8 AH
Wattage of lamp (Watt)	:	55 W
Type of battery	:	Lithium-ion/SMF
Type of housing material	:	ABS
Warranty for HHSL (in years)	:	12 Months
Lamp life (Hours)	:	50000
Run time(Hours)	:	6 Hours
Battery Voltage (Volts)	:	3.7V
Dia of search light (mm)	:	140 mm
Lamp dimming	:	Step type
Effective distance of search light	:	>800 meters



## FGHH-05

Type of lamp	:	LED
Battery capacity (AH)	:	8 AH
Wattage of lamp (Watt)	:	30 W
Type of battery	:	Lithium-ion/SMF
Type of housing material	:	ABS
Warranty for HHSL (in years)	:	12 Months
Lamp life (Hours)	:	50000
Run time(Hours)	:	6 Hours
Battery Voltage (Volts)	:	3.7V
Dia of search light (mm)	:	115 mm
Lamp dimming	:	Step type
Effective distance of search light	:	>600 meters

## FGHH-21



Type of lamp	:	LED
Battery capacity (AH)	:	4-5 AH
Wattage of lamp (Watt)	:	25 W
Type of battery	:	Lithium-ion/SMF
Type of housing material	:	ABS
Warranty for HHSL (in years)	:	12 Months
Lamp life (Hours)	:	50000
Run time(Hours)	:	6 Hours
Battery Voltage (Volts)	:	3.7V
Dia of search light (mm)	:	125-150 mm
Lamp dimming	:	Step type



## FGHH-35

Type of lamp	:	LED
Battery capacity (AH)	:	9 AH
Wattage of lamp (Watt)	:	50 W
Type of battery	:	Lithium-ion/SMF
Type of housing material	:	ABS
Warranty for HHSL (in years)	:	12 Months
Lamp life (Hours)	:	50000
Run time(Hours)	:	6 Hours
Battery Voltage (Volts)	:	3.7V
Dia of search light (mm)	:	125-150 mm
Lamp dimming	:	Step type

# HAND HELD SEARCH LIGHT

FGHH-14



Type of lamp	:	LED
Battery capacity (AH)	:	8 AH
Wattage of lamp (Watt)	:	20 W
Type of battery	:	Lithium-ion/SMF
Type of housing material	:	ABS
Warranty for HHSL (in years)	:	12 Months
Lamp life (Hours)	:	50000
Run time(Hours)	:	2 Hours
Battery Voltage (Volts)	:	3.7V
Dia of search light (mm)	:	100-125 mm
Lamp dimming	:	Step type
Effective distance of search light	:	500 meters

FGHH-05



Type of lamp	:	LED
Battery capacity (AH)	:	4-5 AH
Wattage of lamp (Watt)	:	10 W
Type of battery	:	Lithium-ion/SMF
Type of housing material	:	ABS
Warranty for HHSL (in years)	:	12 Months
Lamp life (Hours)	:	50000
Run time(Hours)	:	5 Hours
Battery Voltage (Volts)	:	4.2 V
Dia of search light (mm)	:	105 mm
Lamp dimming	:	Step type
Effective distance of search light	:	400 meters

FGHH-46



Type of lamp	:	LED
Battery capacity (AH)	:	5 AH
Wattage of lamp (Watt)	:	15 W
Type of battery	:	Lithium-ion/SMF
Type of housing material	:	ABS
Warranty for HHSL (in years)	:	12 Months
Lamp life (Hours)	:	50000
Run time(Hours)	:	5.5 Hours
Battery Voltage (Volts)	:	3.7 V
Dia of search light (mm)	:	76-100 mm
Lamp dimming	:	Step type

FGHH-20



Type of lamp	:	LED
Battery capacity (AH)	:	8 AH
Wattage of lamp (Watt)	:	25 W
Type of battery	:	Lithium-ion/SMF
Type of housing material	:	ABS
Warranty for HHSL (in years)	:	12 Months
Lamp life (Hours)	:	50000
Run time(Hours)	:	6 Hours
Battery Voltage (Volts)	:	3.7 - 4.2 V
Dia of search light (mm)	:	101-125 mm
Lamp dimming	:	Step type

# HAND HELD SEARCH LIGHT

## FGHH-54

Type of lamp	: LED
Dia of search light (mm)	: 50 to 75
Wattage of lamp (Watt)	: 30
Color temperature (Degree K)	: 4000 to 4500 deg. K for other lamps
Type of battery	: Lithium ion
Type of housing material	: Aluminium
Warranty for HHSL (in years)	: 12 Months (Li-ion battery)
Continuous search light operation time at maximum lumen output (Hours)	: FOR LED/XENON $\geq$ 3 HRS
Beam angle selection	: Wide
Lamp dimming	: Continuous
Effective distance of search light	: $\geq$ 100 metres
Type of front glass	: Toughened, scratch resistant
Operation mode	: High Beam/ Low Beam
Gross weight of Search light with battery (Kg) and Ingress protection	: 1.8 kg (max.,) with Li-ion battery
Accessories required	: Recharging Adapter For Both Dc And Ac/ Shoulder Strap



## FGHH-29

Type of lamp	: LED
Dia of search light (mm)	: 50 to 75
Wattage of lamp (Watt)	: 20
Color temperature (Degree K)	: 5500 to 6500 deg. K for other lamps
IP Rating	: IP-66
Beam angle selection	: Narrow and Wide (both feature)
Built-in battery charger	: No but external
Type of battery	: Lithium ion
Type of housing material	: Aluminium
Gross weight	: 1.8 kg (max.,) with Li-ion battery
Warranty for HHSL (in years)	: 12 Months (Li-ion battery)
Lamp dimming	: Step type
lumen output (Hours)	: FOR LED/XENON $\geq$ 2 HRS
Operating Temperature range	: -20 deg C to +55 deg C
Operating Range	: $>$ 500 meter
charging time	: 4Hrs
Lamp life	: 50000hrs



# HAND HELD SEARCH LIGHT

## FGHH-13

Type of lamp	:	LED
Dia of search light (mm)	:	126 to 150
Wattage of lamp (Watt)	:	10
Color temperature (Degree K)	:	5500 to 6500 deg. K for other lamps
IP Rating	:	IP-66
Beam angle selection	:	Narrow
Built-in battery charger	:	Yes
Type of battery	:	Lithium ion
Type of housing material	:	Aluminium
Gross weight	:	1.8 kg (max.,) with Li-ion battery
Warranty for HHSL (in years)	:	12 Months (Li-ion battery)
Lamp dimming	:	Step type
lumen output (Hours)	:	FOR LED/XENON >/= 5 HRS
Operating Temperature range	:	-10 deg C to +55 deg C
Operating Range	:	>500 meter
charging time	:	4Hrs
Lamp life	:	50000hrs



## FGHH-45

Type of lamp	:	LED
Dia of search light (mm)	:	130 to 160
Wattage of lamp (Watt)	:	55
Color temperature (Degree K)	:	5500 to 6500 deg. K for other lamps
IP Rating	:	IP-66
Beam angle selection	:	Narrow and Wide (both feature)
Built-in battery charger	:	No but external
Type of battery	:	Lithium ion
Type of housing material	:	Aluminium
Gross weight	:	4 Kg with Li-ion battery
Warranty for HHSL (in years)	:	12 Months (Li-ion battery)
Lamp dimming	:	Step type
lumen output (Hours)	:	FOR LED/XENON >/= 2 HRS
Operating Temperature range	:	-20 deg C to +55 deg C
Operating Range	:	>500 meter
charging time	:	4Hrs
Lamp life	:	50000hrs



# HAND HELD SEARCH LIGHT

## FGHH-61

Type of lamp	: LED
Dia of search light (mm)	: 50 to 75
Wattage of lamp (Watt)	: 10
Color temperature (Degree K)	: 5500 to 6500 deg. K for other lamps
Type of battery	: Lithium ion
Type of housing material	: Aluminium
Warranty for HHSL (in years)	: 12 Months (Li-ion battery)
lumen output (Hours)	: FOR LED/XENON >/= 5 HRS
Beam angle selection	: Narrow
Built-in battery charger	: NO but external
Battery Voltage (Volts)	: 3.7
Light output of search light	: 1000
Effective distance of search light	: >/= 400 metres



## FGHD-14

Material	: Aluminium Alloy + ABS
LED Light Source	: T6/XPE LED
Net Weight	: 200g
Mode	: High - LOW - Strobe
Battery	: 1800 mAh / Built in Lithium Battery
Charging Method	: Type - C USB
Sensor Distance	: 10 cm
Runtime	: 4 - 6 Hours
Function	: Power Display / Power Bank
Switch	: Press Switch + Long Power Bank
Zoomable Lense	: Telescopic Zoomable Lense



# SHOCK BATON & TRAFFIC BATON



**FGHH-74**

Weight	:	01 Kg (Maximum)
Carriage	:	Hand Held
Body Material	:	ABS
Operating Temperature	:	-20 to 50 degree C
Indicators	:	Full, Low & Charging Battery
Input Voltage	:	220 Volt, 50Hz
Output Voltage	:	Minimum 10 KV
Activation of Shock	:	By Self-Return Trigger Switch



**FGHH-63**

Weight	:	01 Kg (Maximum)
Carriage	:	Hand Held
Body Material	:	ABS
Operating Voltage	:	3.7 V DC
Indicators	:	Full, Low & Charging Battery
Input Voltage	:	220 Volt, 50Hz
Colour	:	Red, Green, White
Extra Features	:	Light on Top and Buzzer



**FGHH-44**

Type of lamp	:	LED
Dia of search light (mm)	:	50 to 75
Wattage of lamp (Watt)	:	10
Color temperature (Degree K)	:	5500 to 6500 deg. K for other lamps
Type of battery	:	Lithium ion
Type of housing material	:	Aluminium
Warranty for HHSL (in years)	:	12 Months (Li-ion battery)
lumen output (Hours)	:	FOR LED/XENON >= 5 HRS
Beam angle selection	:	Narrow
Built-in battery charger	:	NO but external
Battery Voltage (Volts)	:	3.7
Light output of search light	:	1000
Effective distance of search light	:	>= 400 metres



**FGHH-39**

Type of lamp	:	LED
Dia of search light (mm)	:	130 to 160
Wattage of lamp (Watt)	:	40
Color temperature (Degree K)	:	5500 to 6500 deg. K for other lamps
IP Rating	:	IP-66
Beam angle selection	:	Narrow and Wide (both feature)
Built-in battery charger	:	No but external
Type of battery	:	Lithium ion
Type of housing material	:	Aluminium
Gross weight	:	2.5 Kg with Li-ion battery
Warranty for HHSL (in years)	:	12 Months (Li-ion battery)
Lamp dimming	:	Step type
lumen output (Hours)	:	FOR LED/XENON >= 2 HRS
Operating Temperature range	:	-20 deg C to +55 deg C
Operating Range	:	>500 meter
charging time	:	4Hrs
Lamp life	:	50000hrs



**ASCENTECH<sup>®</sup>**

## **CONTACT US:-**

Ascentech Lightning Solution  
Email - [ascentechled@gmail.com](mailto:ascentechled@gmail.com)  
Phone No. +91 81303 88587  
Website :- [www.ascentech.in](http://www.ascentech.in)


## **GET IN TOUCH**



Scan for Website



@Ascentech



@ascentechofficial



@Ascentech